


# ASSEMBLY INSTRUCTIONS

This unit is assembled by friction fitting the components together. The plastic flexible spout and reduced flow tip are both optional pieces to add so assemble the Pourer to best suit your filling needs.

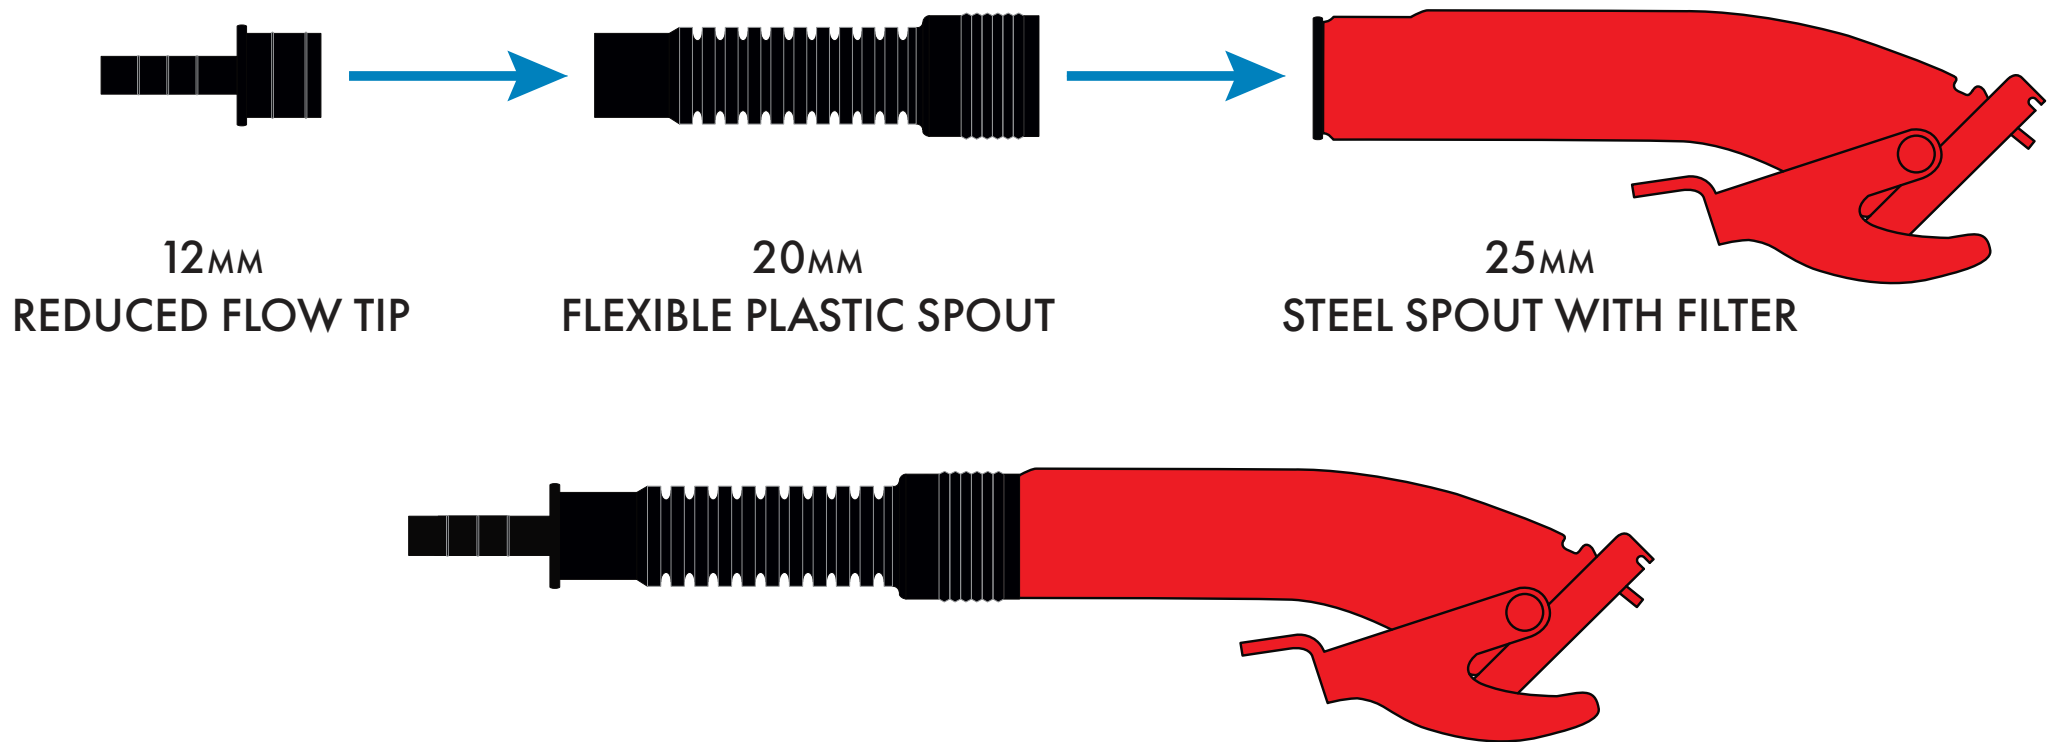

- 12mm tip – Best for filling power garden equipment
- 20mm flexible spout – Fits unleaded fuel tank openings
- 25mm rigid steel spout – Fits diesel fuel tank openings